

REX™ FORTIS COMMERCIAL


REX™ Fortis Commercial delivers unmatched performance and protection for the demanding applications of 5+ story construction. Its surfactant-resistant construction makes it suitable for wood, vinyl, metal, brick, stone, cement siding, stucco, or EIFS.

KEY FEATURES

- 360° drainage technology
- 6-month UV exposure
- 35 perms
- 25-Year Warranty, extendable to Limited Lifetime Warranty with our System Warranty for residential properties

TYPICAL CHARACTERISTICS

	Test Method	Results
Air Penetration Resistance	ASTM E2178	.0008 (cfm/ft2@1.57psf)
Water Vapor Transmission	ASTM E96 Method A	35 perms
Water Penetration Resistance	AATCC 127 (cm)	>300
Basis Weight	TAPPI-410	2.3 oz/sq yd
Thickness	ASTM D3776	8 mils
Breaking Strength	ASTM D882	30 lbs MD
		30 lbs CD
Dry Tensile	ASTM D5034	45 lbs MD
		45 lbs CD
Tear Resistance	ASTM D1117	13.5 lbs MD
		12.5 lbs CD
Drainage Efficiency	ASTM E2273	>95%
Smoke Develop Index	ASTM E84	45 Class A
Flame Spread Index	ASTM E84	5 Class A
UV Exposure		180 Days

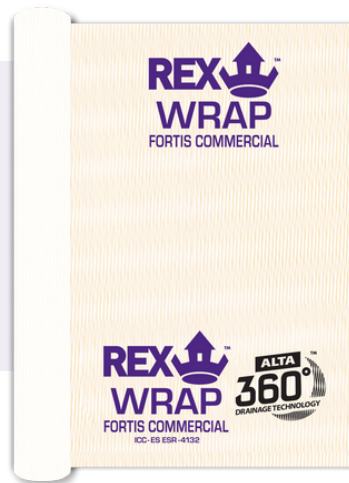

ROLL SIZE

ROLLS PER UNIT

36"x100'	150
36"x150'	135
54"x100'	100
54"x150'	90
9"x100'	50
9"x150'	45
10"x100'	50
10"x150'	45

Enhance your build with our **Lifetime System Warranty** to guarantee long-term durability and performance. All components are designed to work seamlessly together for maximum results.

